



Renew

CEILING FAN COLLECTION




KICHLER

RE-INTRODUCING
Renew

Our Renew ceiling fan collection easily integrates across multiple applications and decor, giving homeowners an appealing style for a modest price point. Inspired by the simple, clean design of a Nordic Vase, the Renew line provides homeowners all the benefits of a Basics ceiling fan as well as:


52"

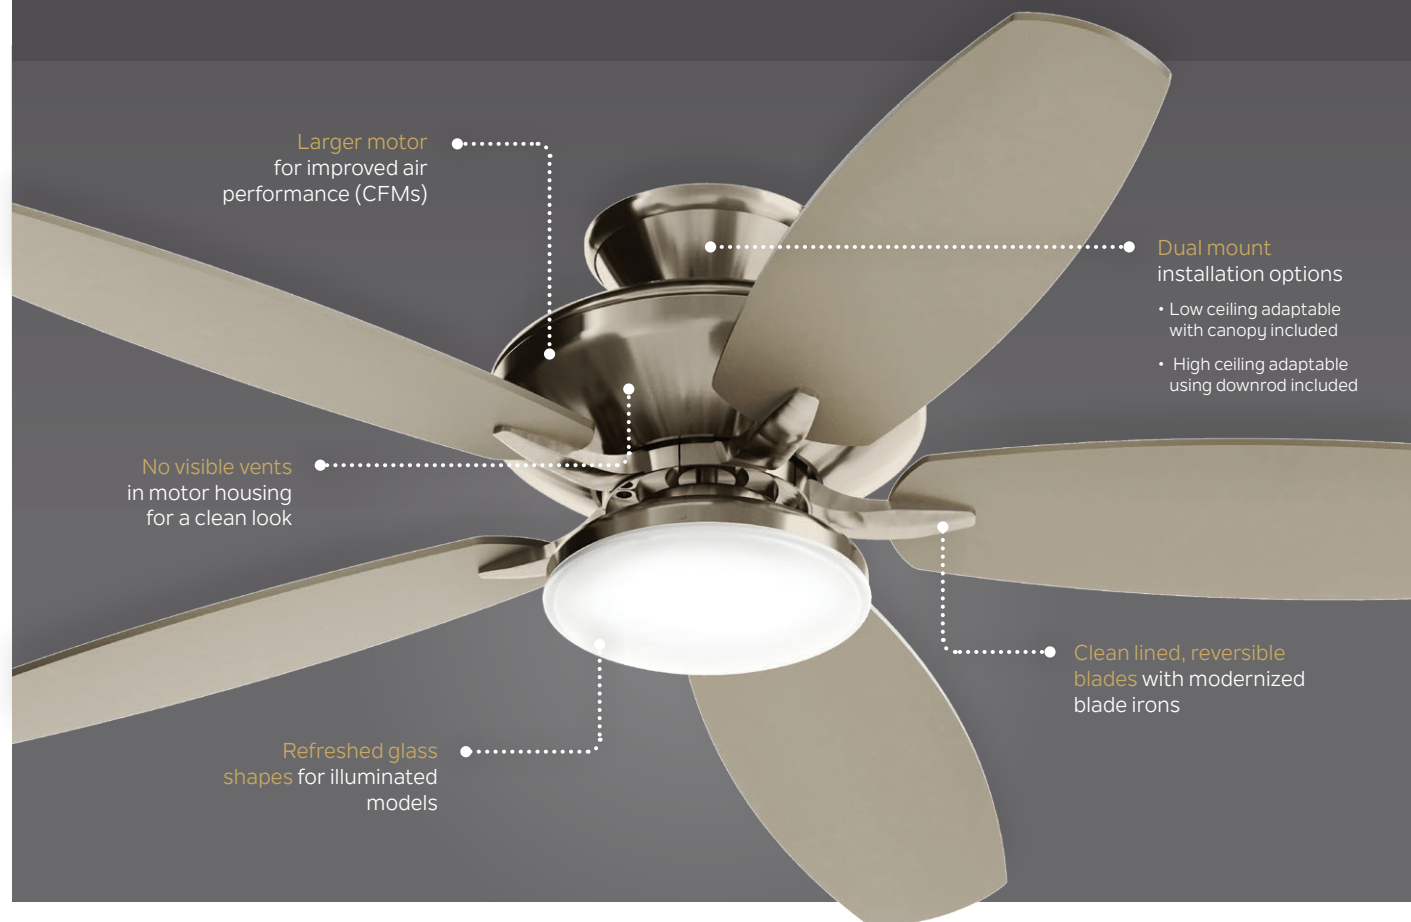

With its soft, modern design aesthetic, solid construction, performance, and core finish selections, a Renew fan works **best in spaces of 100-150 square feet*** – delivering stylish, comfort to your customers space.

Have a large space? Consider adding multiple Renew ceiling fans for added comfort.

*Performance values for fans are based on indoor applications and may vary outdoors due to interference from the elements.

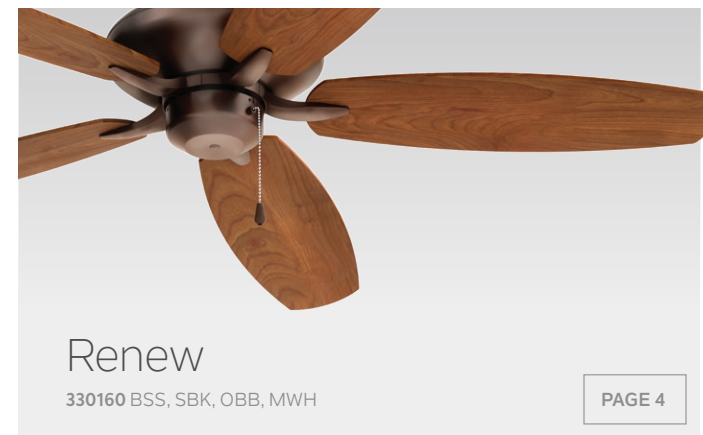

Choosing an AC or DC fan motor for your needs

AC Motor Fans

- Commonly used throughout residential and multi-use applications due to ease of maintenance
- Compatible with optional controls – wall or handheld remotes – that can program up to 65,000 codes to help avoid interference from other electronics
- 3-speeds, Forward and Reverse for desired comfort

DC Motor Fans

- Whisper quiet, making it ideal for homeowner preferences
- Offer a lightweight motor for easier ceiling installation
- Equipped with an internal transformer to convert AC input power to DC, resulting in energy savings as it uses up to 70% less electricity than an AC motor
- 3-speeds, Forward and Reverse for desired comfort

The Renew ENERGY STAR® qualified model features a DC motor; all remaining models feature an AC motor.

Renew

Finish: Brushed Stainless Steel, Satin Black, Oil Brushed Bronze, Matte White

Ideal for indoor spaces in which the fan complements existing primary light sources throughout the room.

52" BLADE SWEEP



330160BSS	Silver	Satin Black	Brushed Stainless Steel BSS
330160SBK	Satin Black	Silver	Satin Black SBK
330160OBB	Walnut	Cherry	Oil Brushed Bronze OBB
330160MWH	Matte White	Distressed Antique Gray	Matte White MWH

AIR PERFORMANCE		
Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4484	59	90

HANGING MEASUREMENTS (DOWNROD - 4.5")

	W/ Downrod	Flush Mount
A Fixture Drop from Ceiling	13.5"	10"
B Blade Drop from Ceiling	10.5"	7"
C Housing Width	11.5"	11.5"
D Ceiling Canopy Width	6.5"	6.5"

INCLUDED CONTROL	OPTIONAL CONTROL
Pull Chain	Wall Control System - Limited Function 371042MUL
	CoolTouch™ Handheld Control System - Limited Function 371082

LIGHT OUTPUT			
Lumens	Watts	CCT	CRI
1400	17	3000	90

Renew Select

Finish: Brushed Stainless Steel, Satin Black, Oil Brushed Bronze, Matte White
Glass: Etched Opal Glass

Offers air circulation and illumination to indoor spaces with its frosted white etched opal glass bowl with LED light module.

52" BLADE SWEEP



LED Integrated LED

330161BSS	Silver	Satin Black	Brushed Stainless Steel BSS
330161SBK	Satin Black	Silver	Satin Black SBK
330161OBB	Walnut	Cherry	Oil Brushed Bronze OBB
330161MWH	Matte White	Distressed Antique Gray	Matte White MWH

AIR PERFORMANCE		
Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4537	59	90

HANGING MEASUREMENTS (DOWNROD - 4.5")

	W/ Downrod	Flush Mount
A Fixture Drop from Ceiling	17.5"	14"
B Blade Drop from Ceiling	10.5"	7"
C Housing Width	11.5"	11.5"
D Ceiling Canopy Width	6.5"	6.5"

Fixture Drop (A) includes light kit

INCLUDED CONTROL	OPTIONAL CONTROL
Pull Chain	Wall Control System - Limited Function 371042MUL
	CoolTouch™ Handheld Control System - Limited Function 371082

LIGHT OUTPUT			
Lumens	Watts	CCT	CRI
1400	17	3000	90

Renew Premier

Finish: Brushed Stainless Steel, Satin Black, Oil Brushed Bronze, Matte White
Glass: Etched Opal Glass

Offers air circulation and illumination to indoor spaces with its 4-light fitter style light kit, including 4 LED medium-based bulbs.

52" BLADE SWEEP



330162BSS	Silver	Satin Black	Brushed Stainless Steel BSS
330162SBK	Satin Black	Silver	Satin Black SBK
330162OBB	Walnut	Cherry	Oil Brushed Bronze OBB
330162MWH	Matte White	Distressed Antique Gray	Matte White MWH

AIR PERFORMANCE		
Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4573	59	91

HANGING MEASUREMENTS (DOWNROD - 4.5")

	W/ Downrod	Flush Mount
A Fixture Drop from Ceiling	19.25"	16.5"
B Blade Drop from Ceiling	10.5"	7"
C Housing Width	11.5"	11.5"
D Ceiling Canopy Width	6.5"	6.5"

Fixture Drop (A) includes light kit

INCLUDED CONTROL	OPTIONAL CONTROL
Pull Chain	Wall Control System - Limited Function 371042MUL
	CoolTouch™ Handheld Control System - Limited Function 371082

LIGHT OUTPUT			
Lumens	Watts	CCT	CRI
2400	9	3000	90

Renew Designer

Finish: Brushed Nickel, Satin Black, Satin Natural Bronze, Matte White
Glass: Etched Opal Glass

The LED platform of this stylish indoor/outdoor fan was designed to look like it was part of the fan in keeping its sleek, clean appearance.

52" BLADE SWEEP



LED Integrated LED Damp Rated

330163NI	Silver	Satin Black	Brushed Nickel NI
330163SBK	Satin Black	Silver	Satin Black SBK
330163SNB	Walnut	Cherry	Satin Natural Bronze SNB
330163MWH	Matte White	Distressed Antique Gray	Matte White MWH

AIR PERFORMANCE*		
Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4380	58	86

HANGING MEASUREMENTS (DOWNROD - 4.5")

	W/ Downrod	Flush Mount
A Fixture Drop from Ceiling	15"	11.5"
B Blade Drop from Ceiling	10.5"	7"
C Housing Width	11.5"	11.5"
D Ceiling Canopy Width	6.5"	6.5"

Fixture Drop (A) includes light kit

INCLUDED CONTROL	OPTIONAL CONTROL
Handheld Control System - Basic 337001WH	Wall Control System - Limited Function 371042MUL
	CoolTouch™ Handheld Control System - Limited Function 371082

LIGHT OUTPUT			
Lumens	Watts	CCT	CRI
1400	17	3000	90

Renew - ENERGY STAR®

Finish: Brushed Stainless Steel, Satin Black, Oil Brushed Bronze, Matte White

DC Motor / ENERGY STAR Qualified – this fan brings both performance and efficiency to indoor spaces.

52" BLADE SWEEP



Energy Star DC DC Motor

330164BSS	Silver	Satin Black	Brushed Stainless Steel BSS
330164SBK	Satin Black	Silver	Satin Black SBK
330164OBB	Walnut	Cherry	Oil Brushed Bronze OBB
330164MWH	Matte White	Distressed Antique Gray	Matte White MWH

AIR PERFORMANCE		
Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
5123	30	163

HANGING MEASUREMENTS (DOWNROD - 4.5")		
	W/ Down Rod	Flush Mount
A Fixture Drop from Ceiling	13.5"	10"
B Blade Drop from Ceiling	10.5"	7"
C Housing Width	11.5"	11.5"
D Ceiling Canopy Width	6.5"	6.5"

INCLUDED CONTROL	OPTIONAL CONTROL
Pull Chain	N/A

Renew Patio

Finish: Brushed Nickel, Satin Black, Satin Natural Bronze, Matte White

Indoor/Outdoor – this damp-rated fan offers comfort throughout a variety of environments.

52" BLADE SWEEP



Damp Rated

330165NI	Silver	Satin Black	Brushed Nickel NI
330165SBK	Satin Black	Silver	Satin Black SBK
330165SNB	Walnut	Cherry	Satin Natural Bronze SNB
330165MWH	Matte White	Distressed Antique Gray	Matte White MWH

AIR PERFORMANCE*		
Airflow	Power Usage	Airflow Efficiency
Cubic Ft. Per Minute on High	Watts on High (Excludes Lights)	Cubic Ft. Per Minute Per Watt
4581	59	91

HANGING MEASUREMENTS (DOWNROD - 4.5")		
	W/ Down Rod	Flush Mount
A Fixture Drop from Ceiling	13.5"	10"
B Blade Drop from Ceiling	10.5"	7"
C Housing Width	11.5"	11.5"
D Ceiling Canopy Width	6.5"	6.5"

INCLUDED CONTROL	OPTIONAL CONTROL
Pull Chain	Wall Control System - Limited Function 371042MUL CoolTouch™ Handheld Control System - Limited Function 371082



AC Control Systems

Includes transmitter and receiver



371082 WH CoolTouch™ Handheld Control System – Limited Function

Wet Rated

- Designed for AC motor fans
- **65K Code**
- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas. Wireless radio frequency operational radius of 30' or less.
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries. Transmitter is Dry-rated for indoor use only. **CoolTouch Limited Function also available in Ivory (IV) faceplate colors - 370010.**



Available Transmitter 371062 MULTR 65K Wall Transmitter – Limited Function Almond (ALM), Ivory (IV) or White (WH)



371085 ALM, IV, WH CoolTouch™ Handheld Control System – Full Function

Wet Rated

- AC Motor Fans
- **65K Code**
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas. Wireless radio frequency operational radius of 30' or less.
- Replaces any single-wall switch or mounts on any flat surface. Retrofits most pull chain fans and most ceiling fan brands.
- Includes transmitter and canopy-mounted, learn mode receiver with 65,000 code settings. Also includes wall bracket and mounting hardware, plus replaceable long-life lithium batteries. Transmitter is Dry-rated for indoor use only. **CoolTouch Limited Function also available in Ivory (IV) faceplate colors - 370010.**



Available Transmitter 371065 MULTR 65K Wall Transmitter - Full Function Almond (ALM), Ivory (IV) or White (WH)



371042MUL Wall Control System – Limited Function

Wet Rated

- Designed for AC motor fans
- **65K Code**
- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware. Hard-wired wall control. Transmitter is Dry-rated for indoor use only.



Available Transmitter 370005 65K CoolTouch™ Transmitter - Limited Function



371045MUL Wall Control System – Full Function

Wet Rated

- Designed for AC motor fans
- **65K Code**
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming (including LED light sources). On/off only for fluorescent.
- Wet-rated for indoor/outdoor covered areas
- Includes transmitter and canopy-mounted, learn-mode receiver with 65,000 code settings. Also includes White, Ivory, and Almond switch and cover plates, plus mounting hardware. Hard-wired wall control. Transmitter is Dry-rated for indoor use only.



Available Transmitter 370006 65K CoolTouch™ Transmitter - Full Function



337001WH Handheld Control System – Basic

- Designed for AC motor fans
- **16 Frequency Code**
- 3 Forward Speeds, Motor Off
- Manual Reverse
- Lights on/off with full-range dimming. On/off only for fluorescent. Not recommended for LED light kits.
- Transmitter is Dry-rated for indoor use only.
- Includes transmitter and canopy-mounted receiver with 16 possible frequencies. Also includes wall bracket and mounting hardware, plus 9-volt battery.



AC Controls – Transmitter only



370038MULTR Wall Transmitter – Full Function

- Designed for AC motor fans
- **16 Frequency Code**
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.



337009WHTR CoolTouch™ Transmitter – Full Function*

- Designed for AC motor fans
- **16 Frequency Code**
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.

Accessories 370010 IV



370039MULTR Wall Transmitter – Limited Function

- Designed for AC motor fans
- **16 Frequency Code**
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket and White, Ivory, and Almond switch and cover plates, plus mounting hardware.



337214TR CoolTouch™ Transmitter – Limited Function*

- Designed for AC motor fans
- **16 Frequency Code**
- 3 Forward Speeds, Reverse, and Motor Off
- Lights on/off with full-range dimming
- Transmitter works with existing system. *Wireless operational radius of 30' or less.
- Includes wall bracket, mounting hardware and White faceplate.

Accessory 370010 IV



Slope Adapter



337005 BSS, NI, MWH, OBB, SNB, SBK 60° Slope Adapter | 6" Dia. x 4"H

- Adapts to sloped or vaulted ceilings from 0° to 60°
- Accepts our CoolTouch™ Receiver Unit for remote controlled fans
- Includes "Stabilized" Mounting System with tension feature
- Safety features prevent fan from "lifting" off mounting system
- Heavy-duty design features 2 safety pins and 1 screw set for maximum safety
- Designed for indoor or outdoor use. Outdoor finishes are powder coated or painted with a galvanized undercoating
- **Designed for use with 1" O.D. downrods ONLY**
- Available in all Kichler® fan finishes
- Downrod sold separately
- U.S. Patent Pending



All Kichler® ceiling fans come standard with our universal hanging system. This basic system allows for mounting on ceilings with up to a 30° slope. For ceilings in excess of 30° of slope, please utilize our 60° Slope Adapter (337005).

Recommended for fan stability in high wind applications. (For any slope or flat ceiling)

Downrod Extensions

Ceiling Height	9 ft.	10 ft.	11 ft.	12 ft.	13 ft.	14 ft.	15 ft. +	
Downrod Size	12"	18"	24"	36"	48"	60"	72"	
FINISHES								
	BSS Brushed Stainless Steel	360000BSS	360001BSS	360002BSS	360003BSS	360004BSS	360005BSS	360006BSS
	MWH Matte White	360000MWH	360001MWH	360002MWH	360003MWH	360004MWH	360005MWH	360006MWH
	NI Brushed Nickel	360000NI	360001NI	360002NI	360003NI	360004NI	360005NI	360006NI
	OBB Oil Brushed Bronze™	360000OBB	360001OBB	360002OBB	360003OBB	360004OBB	360005OBB	360006OBB
	SBK Satin Black	360000SBK	360001SBK	360002SBK	360003SBK	360004SBK	360005SBK	360006SBK
	SNB Satin Natural Bronze	360000SNB	360001SNB	360002SNB	360003SNB	360004SNB	360005SNB	360006SNB

SYMBOL GUIDE



DC MOTOR
CEILING FANS
The ultimate in energy-efficient operation



ENERGY STAR®
CEILING FANS
The trusted, government-backed symbol for energy-efficient products



LED LIGHT KIT
CEILING FANS
Feature a long life, light source that is extremely energy efficient



DAMP-RATED
CEILING FANS
Engineered for high-humidity areas



WET-RATED
CEILING FANS
For open or direct exposure to sun, rain or water spray

DRY-RATED
CEILING FANS
Rated for indoor use only and are NOT intended for damp or wet locations

NOTES

- Bulbs included unless otherwise noted.
- Wattages stated are the maximum recommended; however, you may use lower wattage lamps to suit your lighting needs. Some recommended lamps are not available in the maximum allowable wattage.
- All electrical products are rated as 120-volt, AC unless otherwise noted.
- All electrical products are certified and listed to UL/CSA/ETL Standards for use in U.S. and Canada except where noted.
- All products featured in the outdoor section are certified and listed to UL/CSA/ETL standards for wet location except where noted.
- Finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, airborne pollutants and other forms of weathering.
- To serve you better, Kichler reserves the right to make improvements to the products in this catalog. Therefore, some products may change during the life of the catalog and the product information contained in this catalog may also have changed.
- Kichler® Lighting products are not produced or associated with any Native American Indians, nor are they a Native American product or the product of a particular Indian, Indian tribe or Indian arts and crafts organization as defined by 25 U.S.C. §305 et. seq.

CONSUMER NOTICE

Federal Legislation to phase out 100W incandescent bulbs started January 2012.

The federal government enacted the Energy Independence and Security Act of 2007 in December 2007, requiring all general-purpose light bulbs that produce 310–2600 lumens of light be 30% more energy efficient (similar to current halogen lamps) than current incandescent bulbs by 2014. The efficiency standards started with 100W bulbs in January 2012 and will end with 40W bulbs in January 2014.

Light bulbs outside of this range are exempt from the restrictions (historically, less than 40W or more than 150W). Also exempt are several classes of specialty lights, including appliance lamps, rough service bulbs, 3-way, colored lamps, and plant lights.

Many governments worldwide have passed measures to prohibit the sale of incandescent light bulbs for general lighting. The aim is to encourage use of more energy-efficient lighting alternatives, such as compact fluorescent lamps (CFLs) and LED lamps.

References: www.energy.senate.gov

We go to great lengths to assure the metal, glass finishes and blades shown in the catalog match the actual products, but printing variations and variations in chemical finishes and the nature of hand-applied finishing will cause some differences between the printed images and actual product, and from one product to another.

We use only non-ferrous materials on the exterior parts of our outdoor products, and use the best available weather-resistant finishes. However, due to some extreme environmental conditions such as acid rain, salt air and ultraviolet exposure, we cannot guarantee our exterior finishes, with the exception of our LifeBrite® lanterns.

Due to environmental conditions such as soil acidity, concrete alkalinity and other corrosive soil and air conditions, we cannot guarantee our direct burial posts.

PRODUCT SPEC

- AC.....Alternating Current
- ADAAmericans with Disabilities Act
- AmpAmperage
- CCT.....Color Temperature
- CFM.....Cubic Feet Per Minute
- DC.....Direct Current
- Ft.Feet
- KKelvin Temperature
- LED.....Light Emitting Diodes
- lm.....Lumens
- O.D.Outside Diameter
- RPM.....Revolutions Per Minute
- Sq. Ft.Square Feet
- WWatt, when directly next to a numbers
- WWidth, when paired with L and/or H

FINISHES

- BSSBrushed Stainless Steel
- MWH.....Matte White
- NI.....Brushed Nickel
- OBBOil Brushed Bronze®
- SBK.....Satin Black

CONNECT WITH US




Follow us: [instagram.com/KichlerLighting](https://www.instagram.com/KichlerLighting)
Like us: [facebook.com/Kichler.Lighting](https://www.facebook.com/Kichler.Lighting)
Follow us: twitter.com/KichlerLight
Join us: [houzz.com/pro/KichlerLighting/Kichler](https://www.houzz.com/pro/KichlerLighting/Kichler)
Find us: [pinterest.com/KichlerStyle](https://www.pinterest.com/KichlerStyle)
Watch us: [youtube.com/KichlerLighting](https://www.youtube.com/KichlerLighting)
Find us: [linkedin.com/company/KichlerLighting](https://www.linkedin.com/company/KichlerLighting)

Kichler Lighting
7711 East Pleasant Valley Road
P.O. Box 318010
Cleveland, Ohio 44131

To find an Authorized Dealer, visit
Kichler.com/Where-to-buy



All electrical products are UL/CSA/ or ETL Listed and Certified to UL/CSA Standards for use in U.S.A. and Canada except where noted.

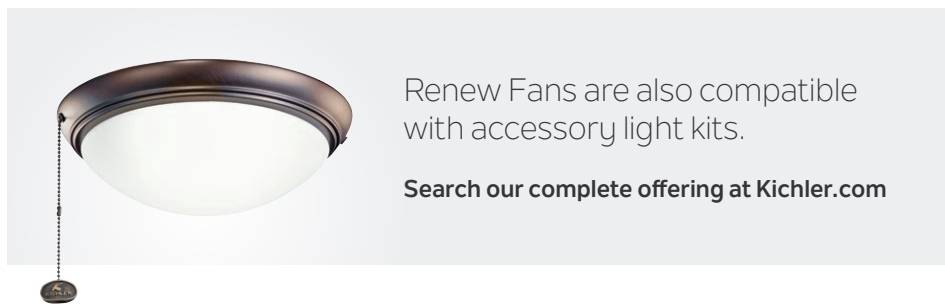

Renew Fans are also compatible with accessory light kits.

Search our complete offering at Kichler.com



Our Vision

At Kichler Lighting, everything we do, every single day, is with the intention of creating and delivering products that allow people to see what matters most to them. We will do that by relentlessly pursuing quality, ensuring continued innovation, always going one step further in our commitment to exceptional customer service and education, as well as creating on-trend designs that are both stylish and “life-stylish,” promising to deliver project success for you.

Get inspired at [Kichler.com](https://www.kichler.com)

KICHLER

Featured on Front Cover: Renew Designer Ceiling Fan | 330163SNB | Page 5